

ESP8266 MicroPython Project with OLED

Sunday January 12, 2025

In my [last post](#), we walked through setup of an ESP8266 project managed with UV. Now we'll construct a more complex project, adding a simple OLED display.


Hardware

Parts needed:

- esp8266 board
- OLED 0.96 inch Display
- jumper wires
- breadboard

(All of this is included in the [ESP32 Basic Starter Kit](#)).

Follow this schematic:

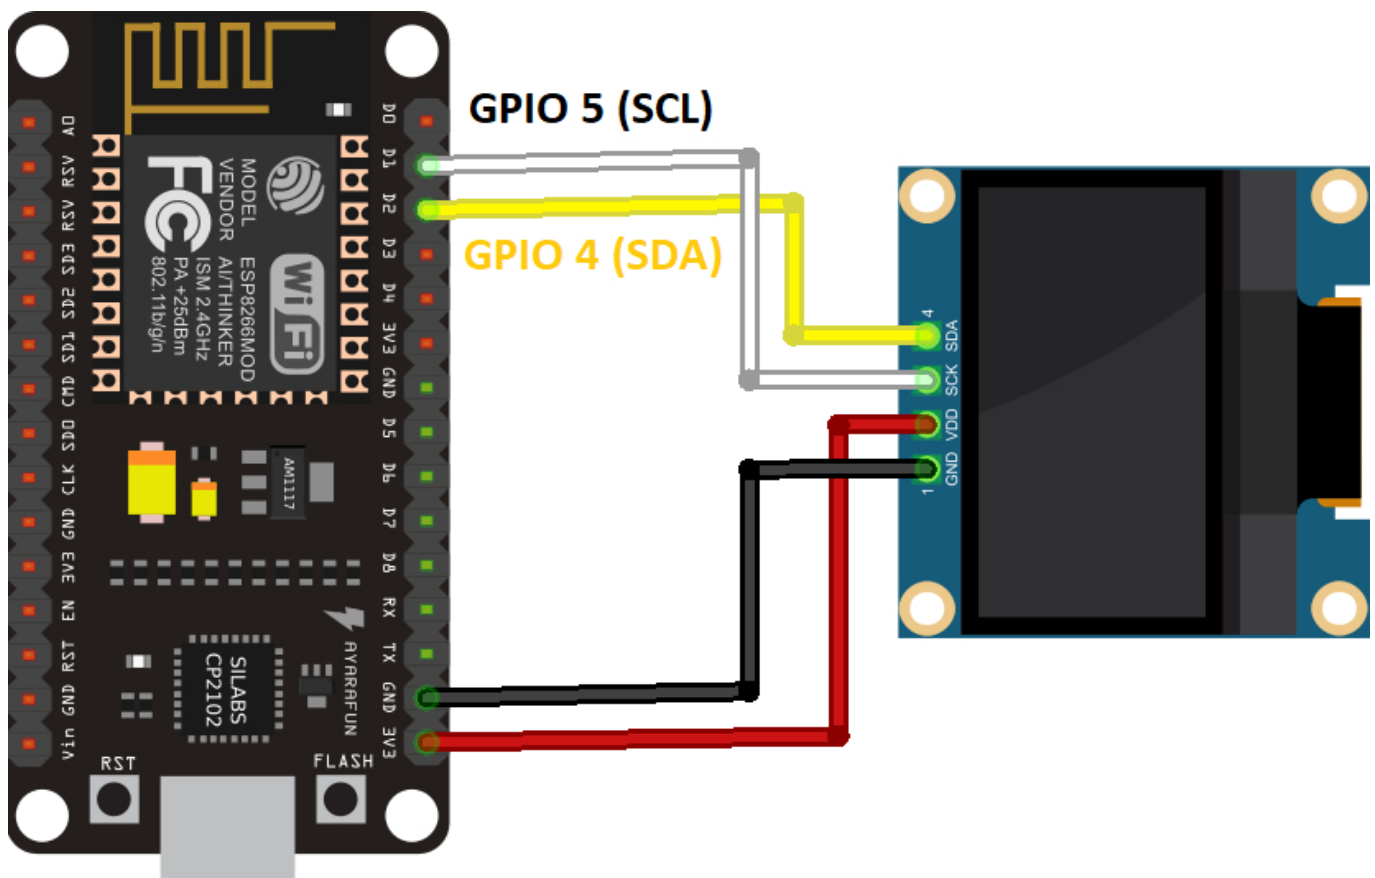

Connections:

OLED	ESP8266
VCC	3.3V
GND	GND
SCL	GPIO 5 (D1)
SDA	GPIO 4 (D2)

Software

Initialize Project

```
mkdir esp8266_oled  
  
cd esp8266_oled  
  
uv init
```

Add Dependencies

```
uv add esptool  
  
uv add adafruit-ampy
```

Make sure you can communicate with the esp8266:

```
uv tool run --from esptool esptool.py chip_id
```

Flash MicroPython to the ESP8266

```
wget https://micropython.org/resources/firmware/ESP8266_GENERIC-20241129-v1.24.1.bin  
  
uv tool run --from esptool esptool.py erase_flash  
  
uv tool run --from esptool esptool.py --baud 460800 write_flash --  
flash_size=detect 0 ESP8266_GENERIC-20241129-v1.24.1.bin
```

Create Scripts

The MicroPython standard library doesn't include support for the OLED by default. We'll create a new **ssd1306.py** file and update it with the required code.

```
touch ssd1306.py
```

Copy the contents of

<https://github.com/RuiSantosdotme/ESP-MicroPython/raw/master/code/Others/OLED/ssd1306.py> into the file:

```
# MicroPython SSD1306 OLED driver, I2C and SPI interfaces created by
Adafruit

import time
import framebuf

# register definitions
SET_CONTRAST          = const(0x81)
SET_ENTIRE_ON         = const(0xa4)
SET_NORM_INV          = const(0xa6)
SET_DISP              = const(0xae)
SET_MEM_ADDR          = const(0x20)
SET_COL_ADDR          = const(0x21)
SET_PAGE_ADDR         = const(0x22)
SET_DISP_START_LINE   = const(0x40)
SET_SEG_REMAP         = const(0xa0)
SET_MUX_RATIO         = const(0xa8)
SET_COM_OUT_DIR       = const(0xc0)
SET_DISP_OFFSET       = const(0xd3)
SET_COM_PIN_CFG       = const(0xda)
SET_DISP_CLK_DIV      = const(0xd5)
SET_PRECHARGE         = const(0xd9)
SET_VCOM_DESEL        = const(0xdb)
SET_CHARGE_PUMP        = const(0x8d)

class SSD1306:
    def __init__(self, width, height, external_vcc):
        self.width = width
        self.height = height
        self.external_vcc = external_vcc
        self.pages = self.height // 8
        # Note the subclass must initialize self.framebuf to a framebuffer.
        # This is necessary because the underlying data buffer is different
        # between I2C and SPI implementations (I2C needs an extra byte).
        self.poweron()
        self.init_display()

    def init_display(self):
        for cmd in (
            SET_DISP | 0x00, # off
            # address setting
            SET_MEM_ADDR, 0x00, # horizontal
            # resolution and layout
            SET_DISP_START_LINE | 0x00,
            SET_SEG_REMAP | 0x01, # column addr 127 mapped to SEG0
```

```
        SET_MUX_RATIO, self.height - 1,  
        SET_COM_OUT_DIR | 0x08, # scan from COM[N] to COM0  
        SET_DISP_OFFSET, 0x00,  
        SET_COM_PIN_CFG, 0x02 if self.height == 32 else 0x12,  
        # timing and driving scheme  
        SET_DISP_CLK_DIV, 0x80,  
        SET_PRECHARGE, 0x22 if self.external_vcc else 0xf1,  
        SET_VCOM_DESEL, 0x30, # 0.83*Vcc  
        # display  
        SET_CONTRAST, 0xff, # maximum  
        SET_ENTIRE_ON, # output follows RAM contents  
        SET_NORM_INV, # not inverted  
        # charge pump  
        SET_CHARGE_PUMP, 0x10 if self.external_vcc else 0x14,  
        SET_DISP | 0x01): # on  
        self.write_cmd(cmd)  
    self.fill(0)  
    self.show()  
  
    def poweroff(self):  
        self.write_cmd(SET_DISP | 0x00)  
  
    def contrast(self, contrast):  
        self.write_cmd(SET_CONTRAST)  
        self.write_cmd(contrast)  
  
    def invert(self, invert):  
        self.write_cmd(SET_NORM_INV | (invert & 1))  
  
    def show(self):  
        x0 = 0  
        x1 = self.width - 1  
        if self.width == 64:  
            # displays with width of 64 pixels are shifted by 32  
            x0 += 32  
            x1 += 32  
        self.write_cmd(SET_COL_ADDR)  
        self.write_cmd(x0)  
        self.write_cmd(x1)  
        self.write_cmd(SET_PAGE_ADDR)  
        self.write_cmd(0)  
        self.write_cmd(self.pages - 1)  
        self.write_framebuf()  
  
    def fill(self, col):  
        self.framebuf.fill(col)  
  
    def pixel(self, x, y, col):  
        self.framebuf.pixel(x, y, col)
```

```

def scroll(self, dx, dy):
    self.framebuf.scroll(dx, dy)

def text(self, string, x, y, col=1):
    self.framebuf.text(string, x, y, col)

class SSD1306_I2C(SSD1306):
    def __init__(self, width, height, i2c, addr=0x3c, external_vcc=False):
        self.i2c = i2c
        self.addr = addr
        self.temp = bytearray(2)
        # Add an extra byte to the data buffer to hold an I2C data/command
        # to use hardware-compatible I2C transactions. A memoryview of the
        # buffer is used to mask this byte from the framebuffer operations
        # (without a major memory hit as memoryview doesn't copy to a
        # separate
        # buffer).
        self.buffer = bytearray(((height // 8) * width) + 1)
        self.buffer[0] = 0x40 # Set first byte of data buffer to Co=0,
        # D/C=1
        self.framebuf = framebuf.FrameBuffer1(memoryview(self.buffer)[1:],
        width, height)
        super().__init__(width, height, external_vcc)

    def write_cmd(self, cmd):
        self.temp[0] = 0x80 # Co=1, D/C#=0
        self.temp[1] = cmd
        self.i2c.writeto(self.addr, self.temp)

    def write_framebuf(self):
        # Blast out the frame buffer using a single I2C transaction to
        # support
        # hardware I2C interfaces.
        self.i2c.writeto(self.addr, self.buffer)

    def poweron(self):
        pass

class SSD1306_SPI(SSD1306):
    def __init__(self, width, height, spi, dc, res, cs, external_vcc=False):
        self.rate = 10 * 1024 * 1024
        dc.init(dc.OUT, value=0)
        res.init(res.OUT, value=0)
        cs.init(cs.OUT, value=1)
        self.spi = spi
        self.dc = dc
        self.res = res

```

```
self.cs = cs
self.buffer = bytearray((height // 8) * width)
self.framebuf = framebuf.FrameBuffer1(self.buffer, width, height)
super().__init__(width, height, external_vcc)

def write_cmd(self, cmd):
    self.spi.init(baudrate=self.rate, polarity=0, phase=0)
    self.cs.high()
    self.dc.low()
    self.cs.low()
    self.spi.write(bytearray([cmd]))
    self.cs.high()

def write_framebuf(self):
    self.spi.init(baudrate=self.rate, polarity=0, phase=0)
    self.cs.high()
    self.dc.high()
    self.cs.low()
    self.spi.write(self.buffer)
    self.cs.high()

def poweron(self):
    self.res.high()
    time.sleep_ms(1)
    self.res.low()
    time.sleep_ms(10)
    self.res.high()
```

Create and update **main.py**. This is our entry point.

touch main.py

1. Copy contents of <https://github.com/RuiSantosdotme/ESP-MicroPython/raw/master/code/Others/OLED/main.py> into the file, then
2. Comment the esp32 pin assignment and uncomment the esp8266 pin assignment

Contents should end up like this:

```
# Complete project details at
https://RandomNerdTutorials.com/micropython-programming-with-esp32-and-esp8266/

from machine import Pin, SoftI2C
import ssd1306
from time import sleep

# ESP32 Pin assignment
# i2c = SoftI2C(scl=Pin(22), sda=Pin(21)) # esp32
```

```
# ESP8266 Pin assignment
i2c = SoftI2C(scl=Pin(5), sda=Pin(4))

oled_width = 128
oled_height = 64
oled = ssd1306.SSD1306_I2C(oled_width, oled_height, i2c)

oled.text('Hello, World!', 0, 0)
oled.text('Hello, World 2!', 0, 10)
oled.text('Hello, World 3!', 0, 20)

oled.show()
```

Upload Scripts to ESP3266

```
uv tool run --from adafruit-ampy ampy -p /dev/ttyUSB0 put ssd1306.py
uv tool run --from adafruit-ampy ampy -p /dev/ttyUSB0 put main.py
uv tool run --from adafruit-ampy ampy -p /dev/ttyUSB0 ls
```

Run the Main Script

```
uv tool run --from adafruit-ampy ampy -p /dev/ttyUSB0 run main.py
```

On the OLED display you should see this:

```
Hello, World!
Hello, World 2!
Hello, World 3!
```

You can learn more about what the code is doing here:

<https://randomnerdtutorials.com/micropython-oled-display-esp32-esp8266/>

From:

<https://blog.devtoprd.com/> - **Jim's Blog**

Permanent link:

https://blog.devtoprd.com/doku.php?id=posts:2025:2025_01_12_esp8266_oled&rev=1743355699

Last update: **2025/03/30 10:28**

